





حرارت گستر
HARARAT GOSTAR
QUALITY THROUGH DESIGN & WORKMANSHIP
STEAM & WATER TREATMENT

DEALKALIZER



NO.86, TALEGHANI AVE., TEHRAN, IRAN
P.O.Box:15875-5371
TEL : (021)77 60 58 89, 77 60 58 93
FAX : (021)77 60 45 31
EMAIL : INFO@HARARAT-GOSTAR.COM
HTTP://WWW.HARARAT-GOSTAR.COM

"LD" DEALKALIZER

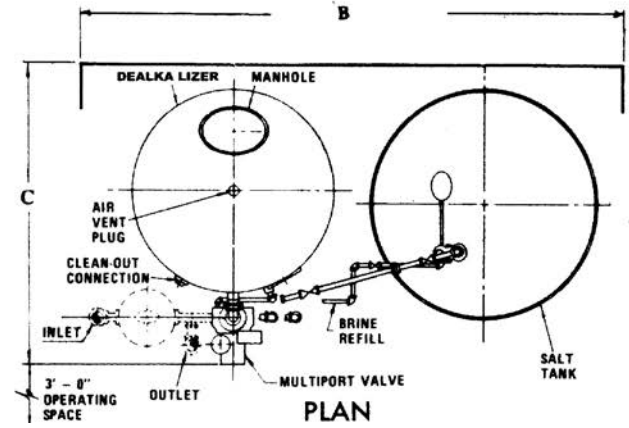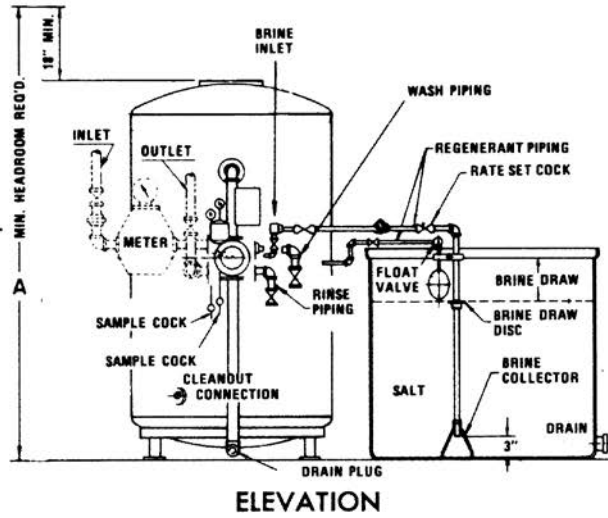

MODEL	CAPACITY+		RESIN		FLOW RATE GPM		BACK WASH RATE	MULTIPORT VALVE SIZE	DEALKALIZER TANK DIMENSION	SUGGESTED SALT TANK DIA.(IN.)	SALT DOSAGE (LBS.)		SUGGESTED REQUIRED SPACE		
	MAX.	MIN.	MAX.	MIN.	SERVICE	PEAK					A	B	C		
	Kgr	Kgr	CU.FT	CU.FT	++	+++					GPM	INCH	INCH	MIN. /MAX.	MAX.
LD10	40	25	1.4	0.9	3.5	4.5	2	1/2	10 × 40	12/16	21	13	60	52	36
LD12	60	35	2.2	1.1	7	9	3	3/4	12 × 40	14/18	33	17	60	57	38
LD16	80	50	2.9	1.7	9	12	5	3/4	16 × 40	18/24	43	26	78	64	42
LD18	120	65	4.3	2.3	13	17	7	3/4	18 × 48	20/24	64	34	84	68	44
LD20	160	80	5.7	2.9	17	24	10	1	20 × 48	24/30	86	43	84	74	48
LD24	200	120	7.2	4.3	22	29	12	1	24 × 60	30/32	107	64	90	84	54
LD28	280	180	10	6.4	30	35	17	1 ¼	28 × 60	30/36	150	96	90	88	54
LD30A	360	220	12.8	7.9	39	52	19	1 ¼	30 × 60	36/48	194	118	113	96	60
LD30B	440	280	15.7	10	47	63	21	1 ½	30 × 72	36/48	235	150	115	96	60
LD36	600	400	21.4	14.3	64	89	30	1 ½	36 × 72	42/52	321	214	115	108	72
LD42	800	520	28	18.6	84	115	40	1 ½	42 × 72	48/66	429	279	117	120	75
LD48	1200	720	42.9	25.7	129	177	53	2	48 × 72	52/72	643	386	118	130	81
LD54	1480	880	52.9	31.4	159	217	67	2	54 × 72	60/84	793	471	119	144	94
LD60	1920	1040	68.6	37.1	168	222	88	2 ½	60 × 72	66/84	1029	557	122	155	102

+ Salt dosage at 15 lbs./cu.ft
 ++ At 15 Psi loss or less
 +++ At 25 Psi loss or less

BROKEN LINES FURNISHED BY PURCHASER